



FIG. 1

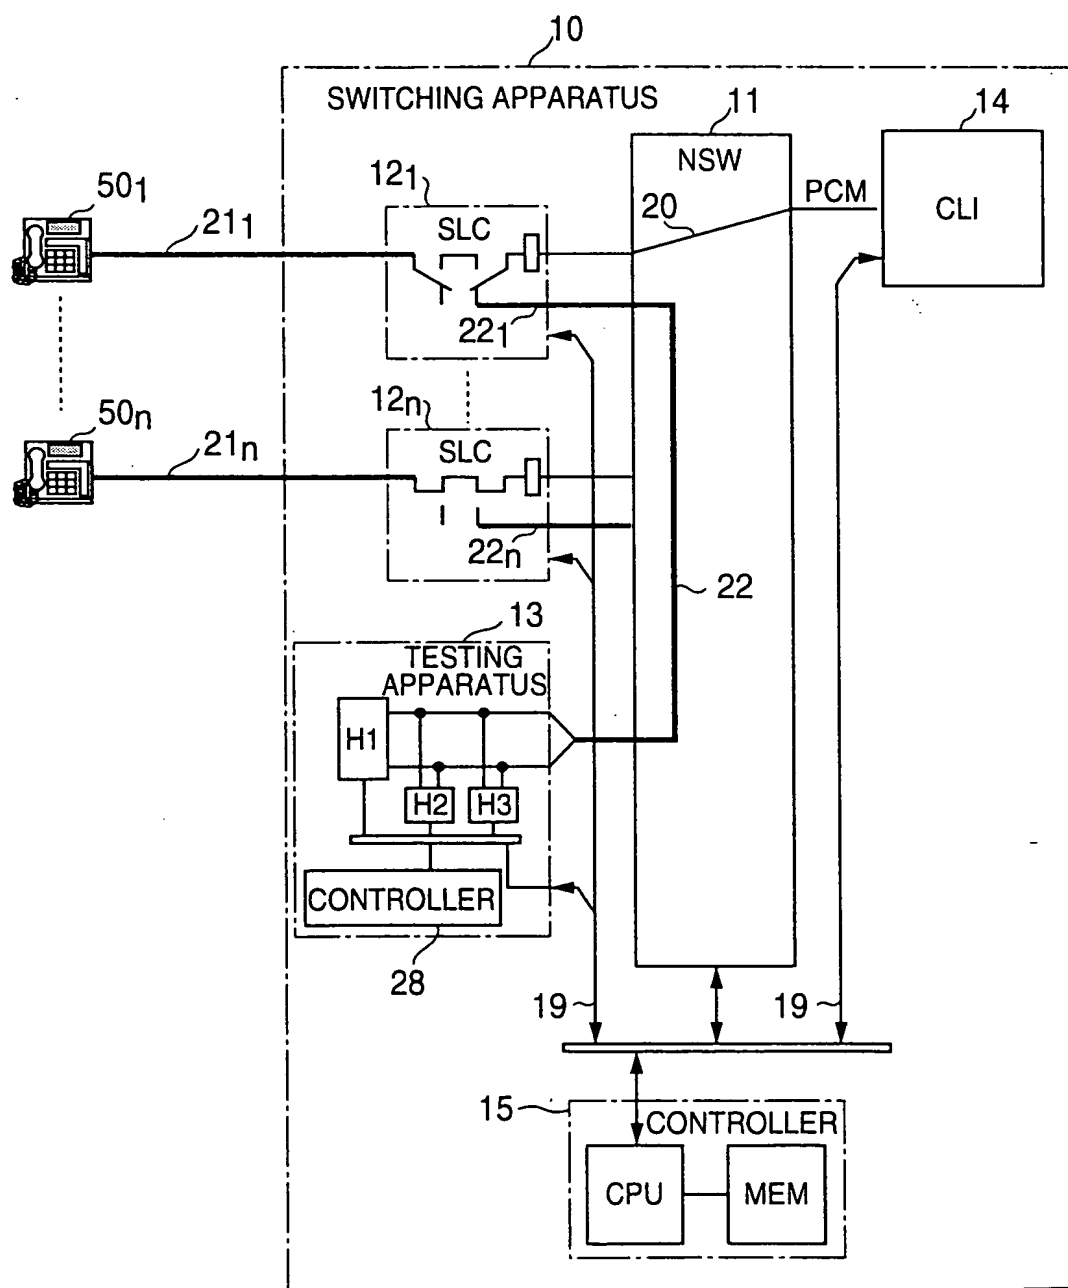

005007-82662960

FIG. 2

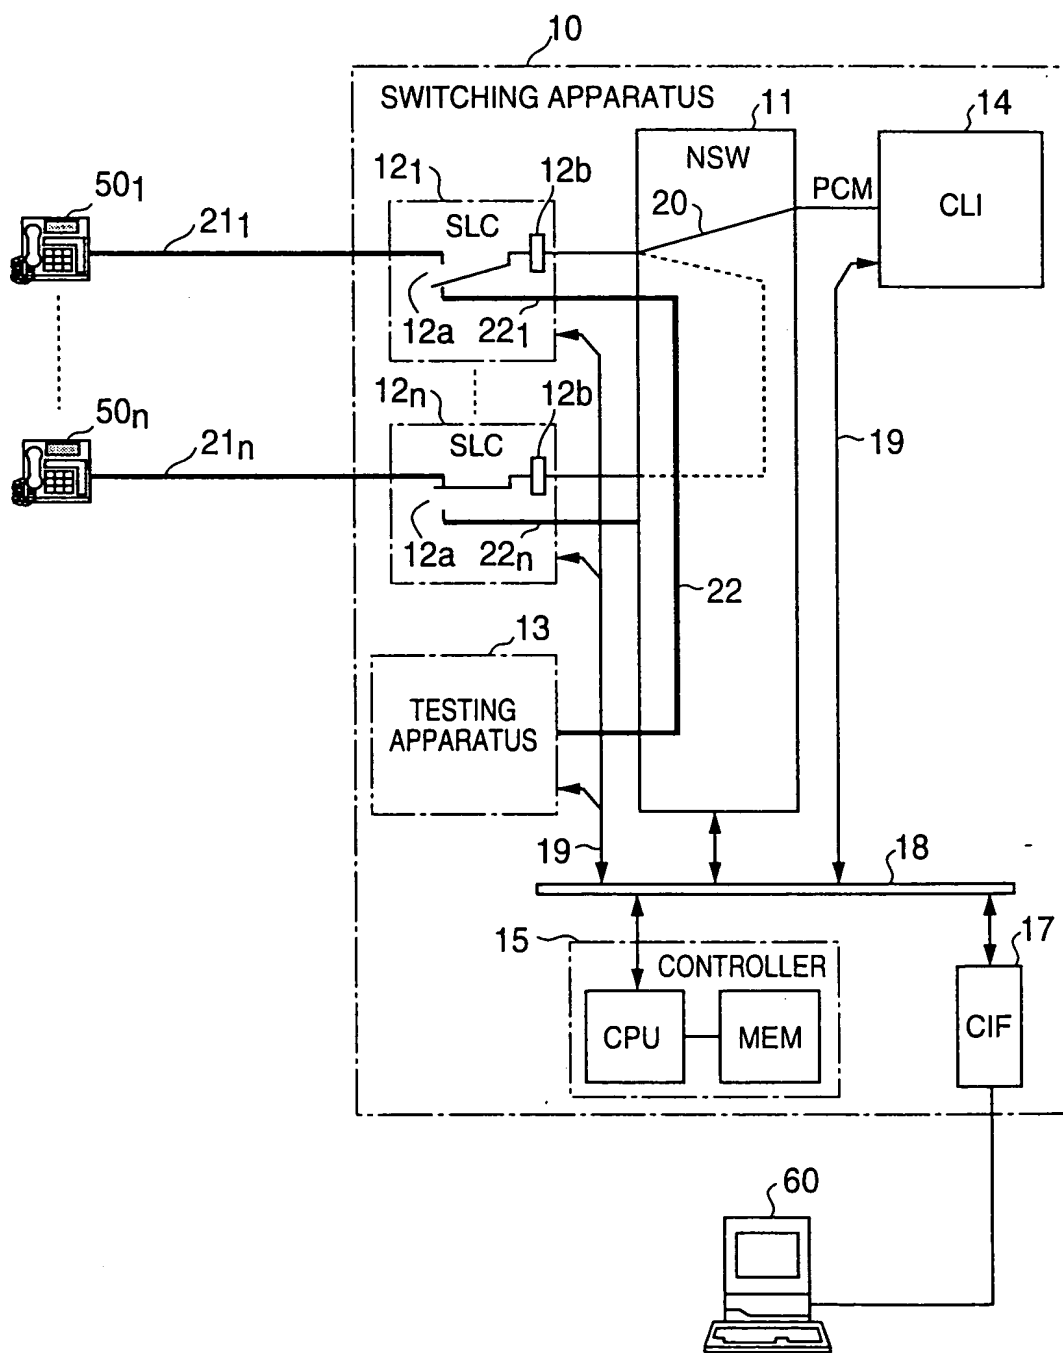

005007-82002960

FIG. 3


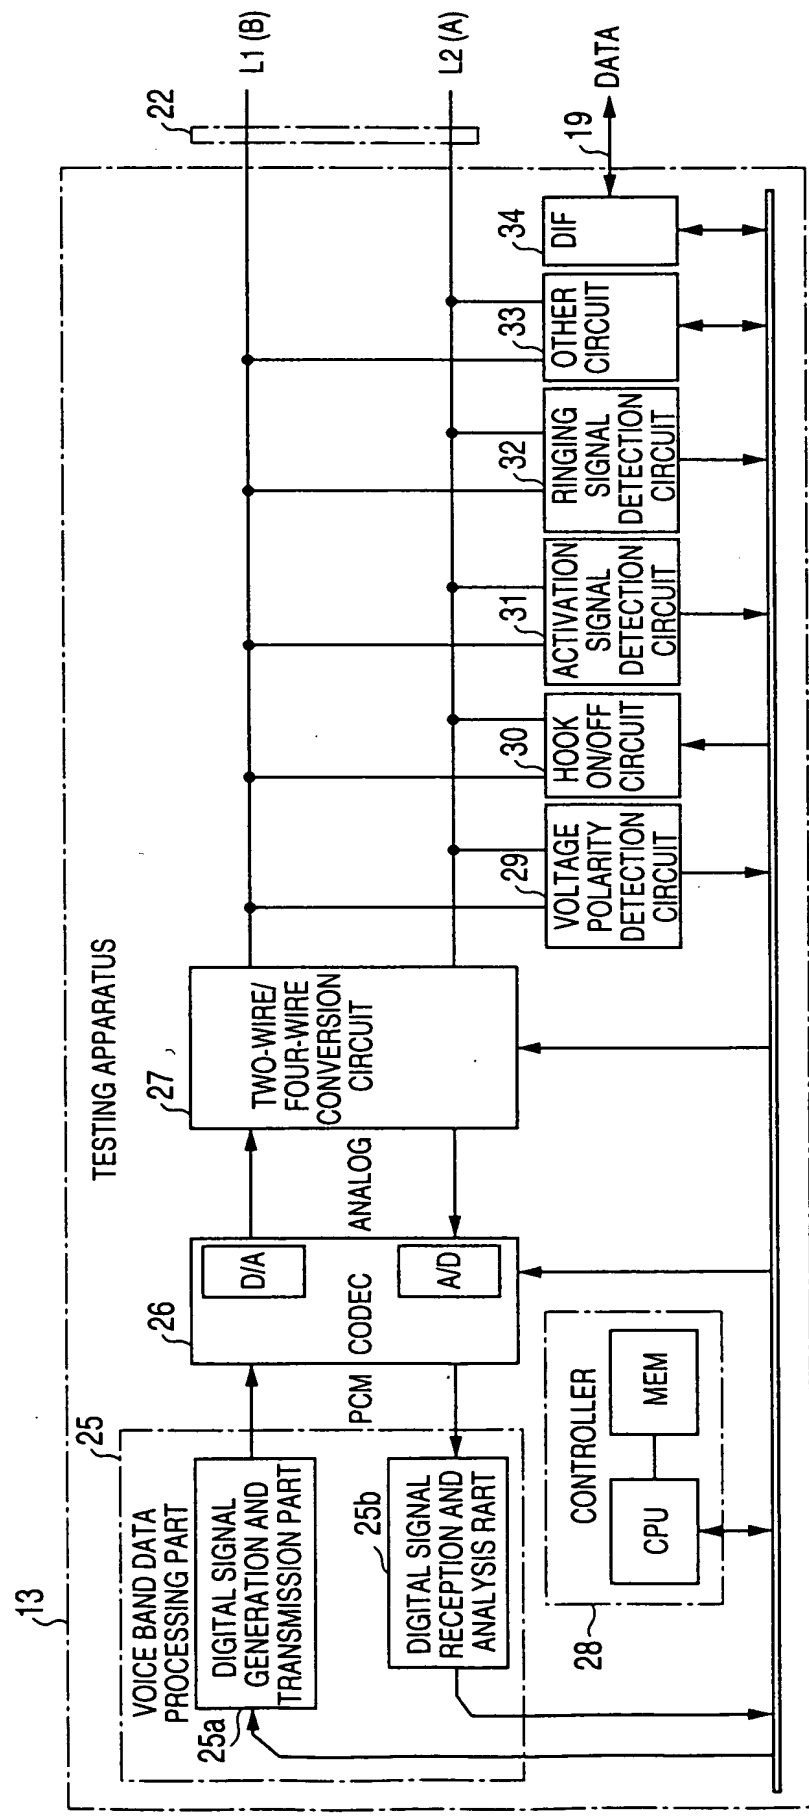


FIG. 4

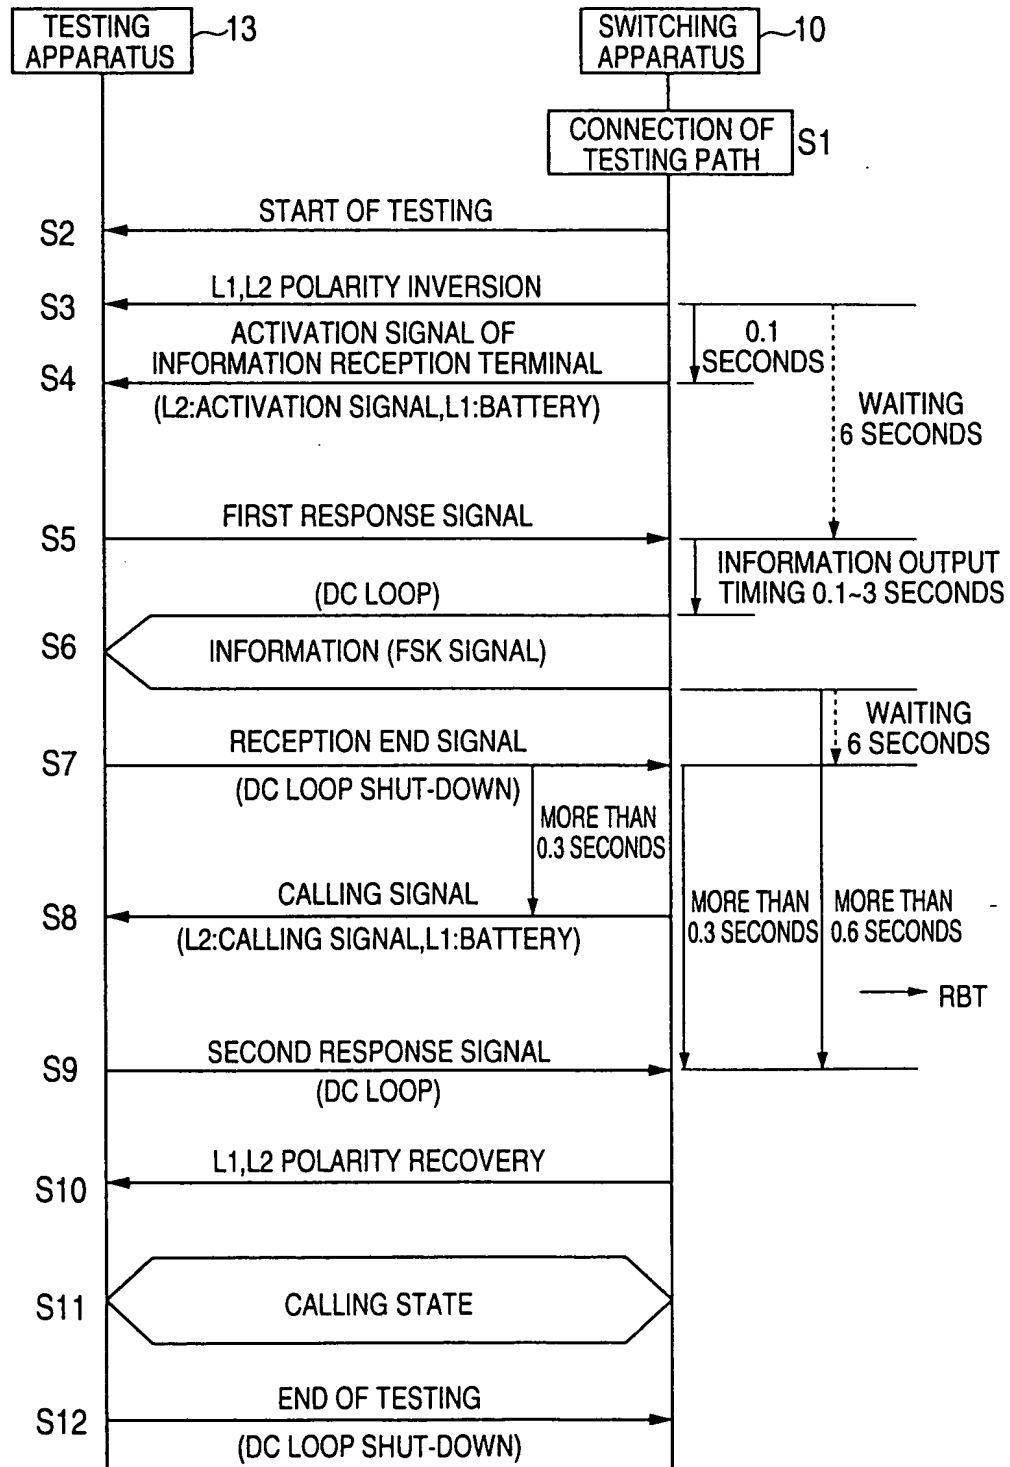

005001 52662960

FIG. 5


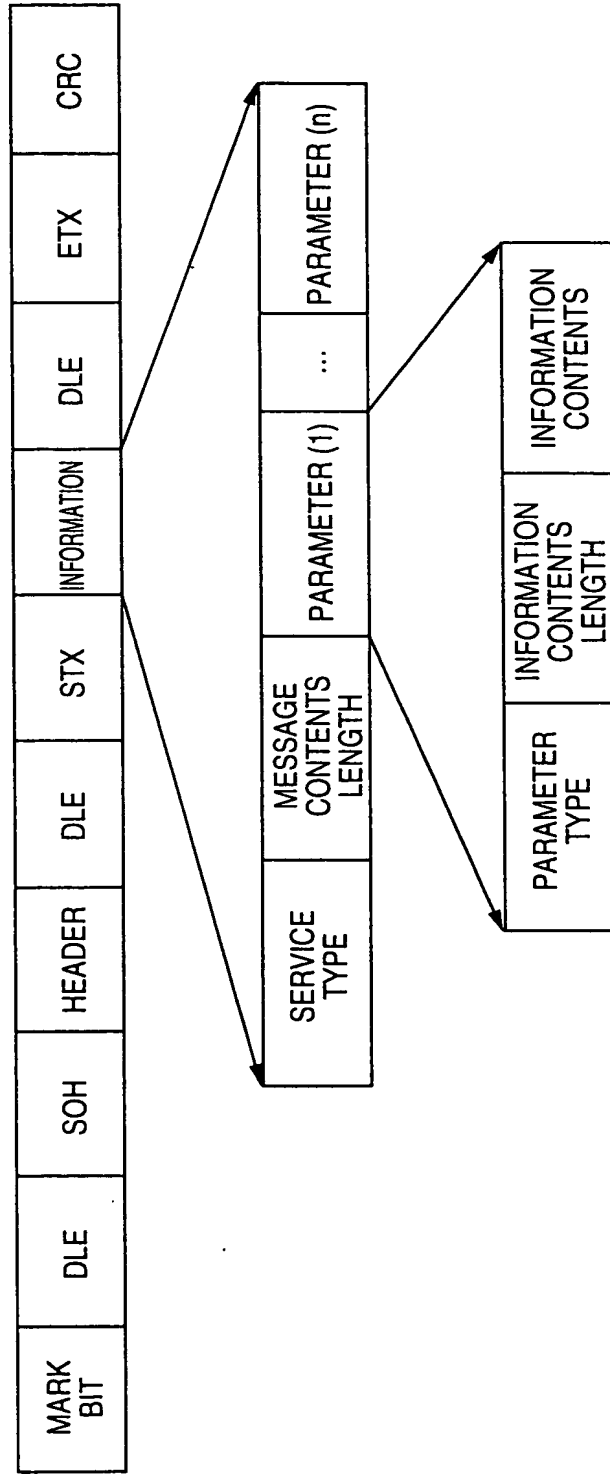


FIG. 6


| SIGNAL NAME | BIT REPRESENTATION | REMARKS |
|-----------------------------|--------------------|--|
| MARK BIT | SEQUENCE OF ONE | MORE THAN 60ms |
| CONTROL SIGNAL | B7~B1 | FUNCTIONS |
| DLE | 0010000 | CONTROL SIGNAL FOR TRANSPARENT MODE |
| SOH | 0000001 | START OF HEADING OF INFORMATION |
| HEADER | 0000111 | SENDING INFORMATION FROM SWITCHING APPARATUS TO TERMINAL (BIN) |
| STX | 0000010 | START OF TEXT AND END OF HEADING |
| SERVICE TYPE | 1000000 | INFORMATION NOTIFICATION SERVICE BEFORE COMMUNICATION |
| MESSAGE CONTENTS LENGTH | 0000001~1110101 | TOTAL BYTES OF PARAMETER (1)~(n) (BIN) |
| PARAMETER TYPE | | (BIN) |
| INFORMATION CONTENTS LENGTH | | BYTE NUMBER OF PARAMETER (BIN) |
| INFORMATION CONTENTS | | (CHARACTER PRESENTATION) |
| FTX | 0000011 | END OF TEXT |
| SI | 0001111 | USE OF ROMAN ALPHABET FOR FIGURE |
| SO | 0001110 | USE OF KATAKANA FOR FIGURE |
| CRC | | 16 BIT CRC RESULT |

00500T-82662560


FIG. 7

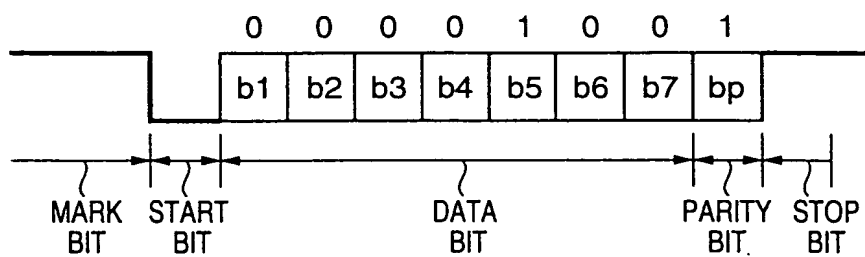

(A)

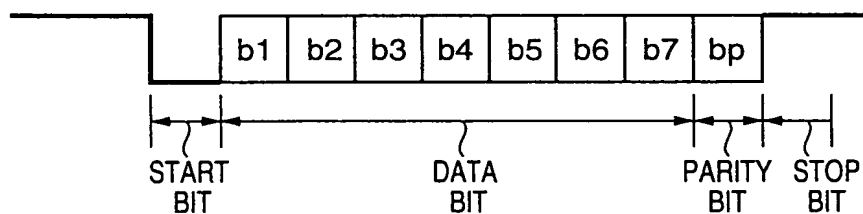


(B)

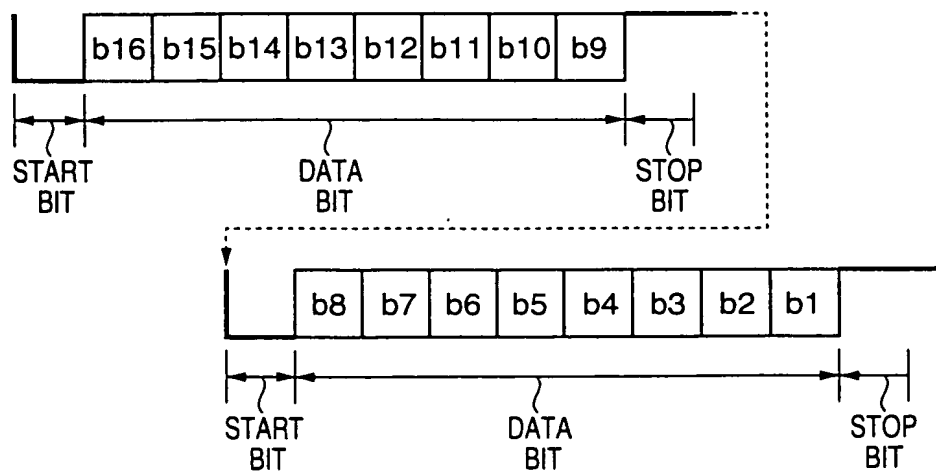

(C)

005007-82662960


FIG. 8

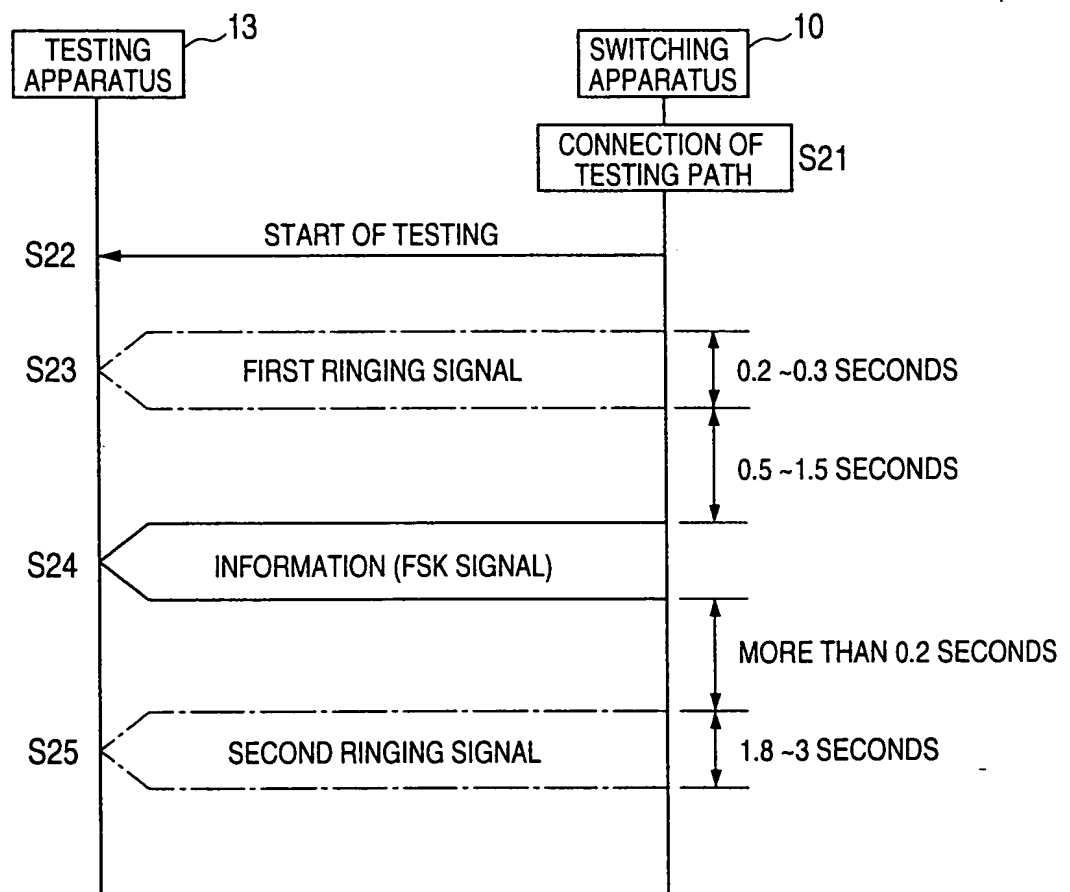

005007-82662960

[illegible]

FIG. 11

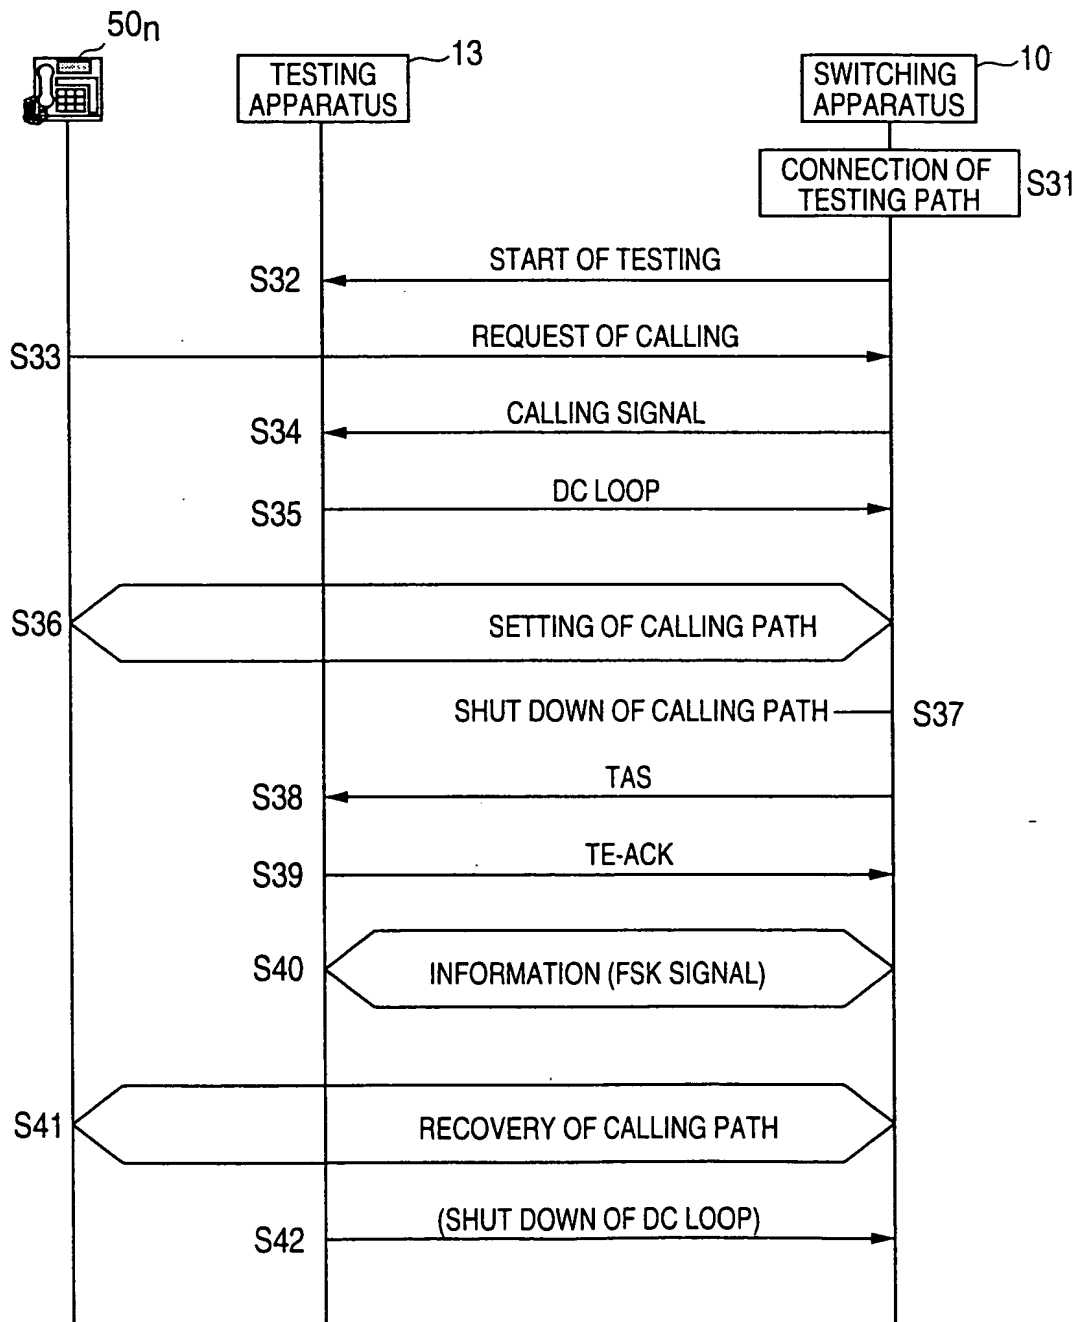

005007-82662960

FIG. 12




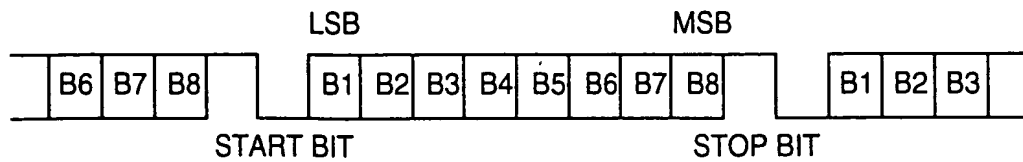


FIG. 13

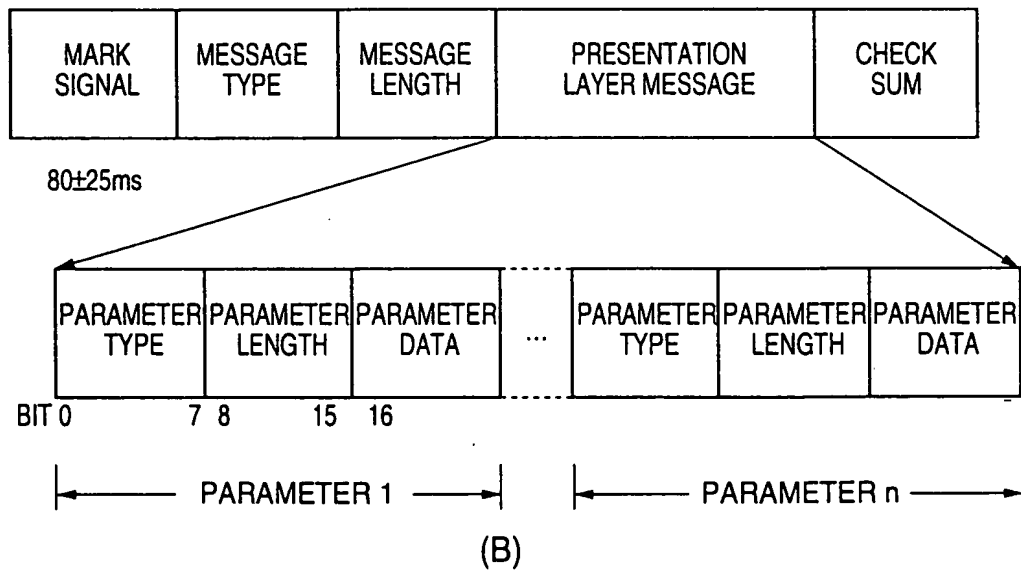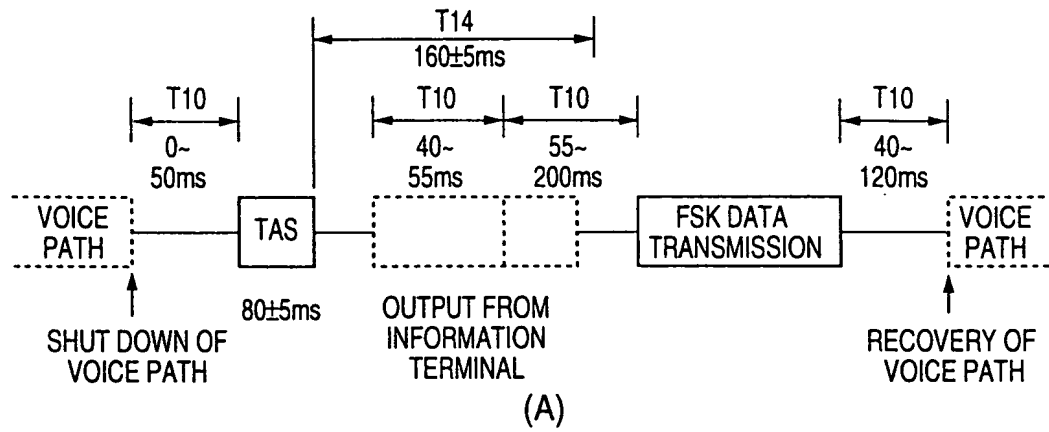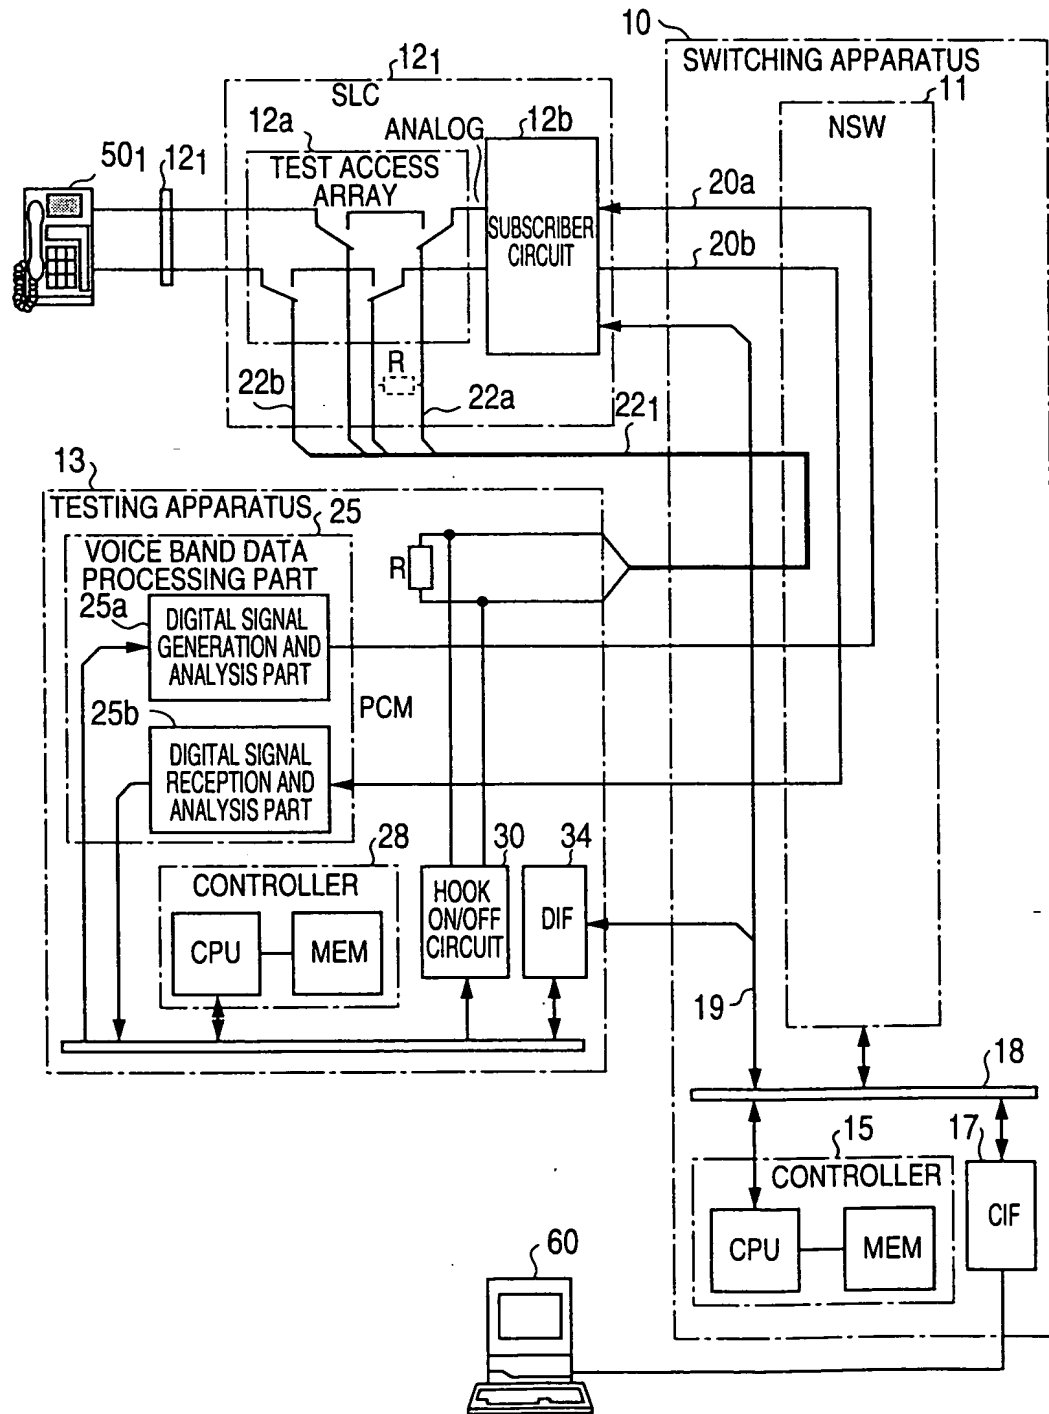

005001 82662960

FIG. 14



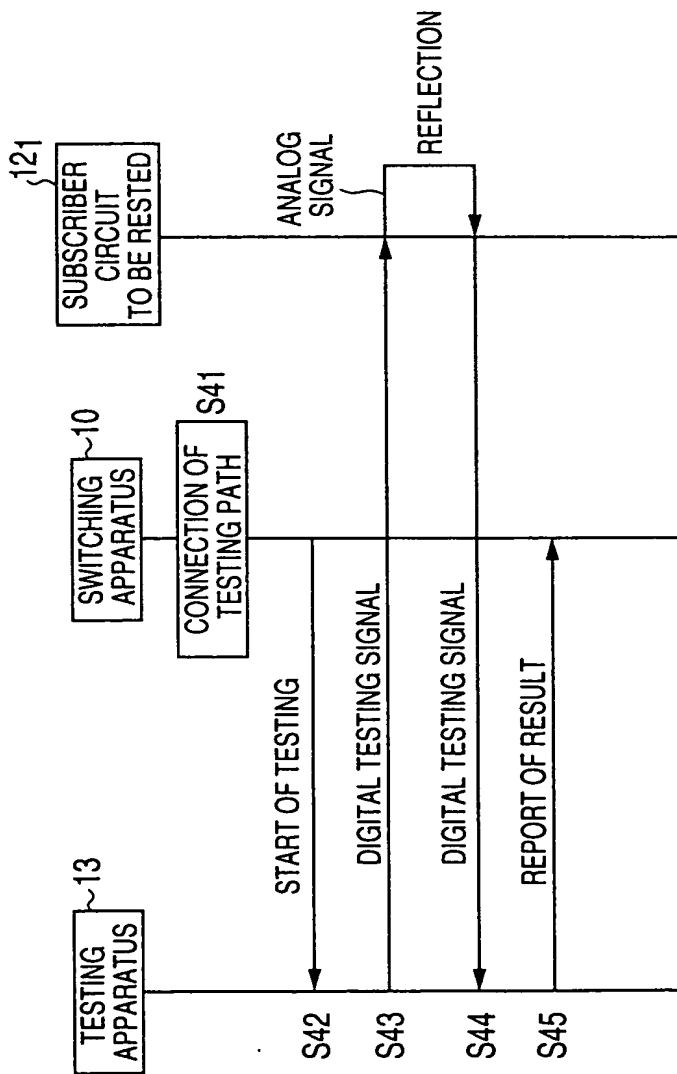


FIG. 15

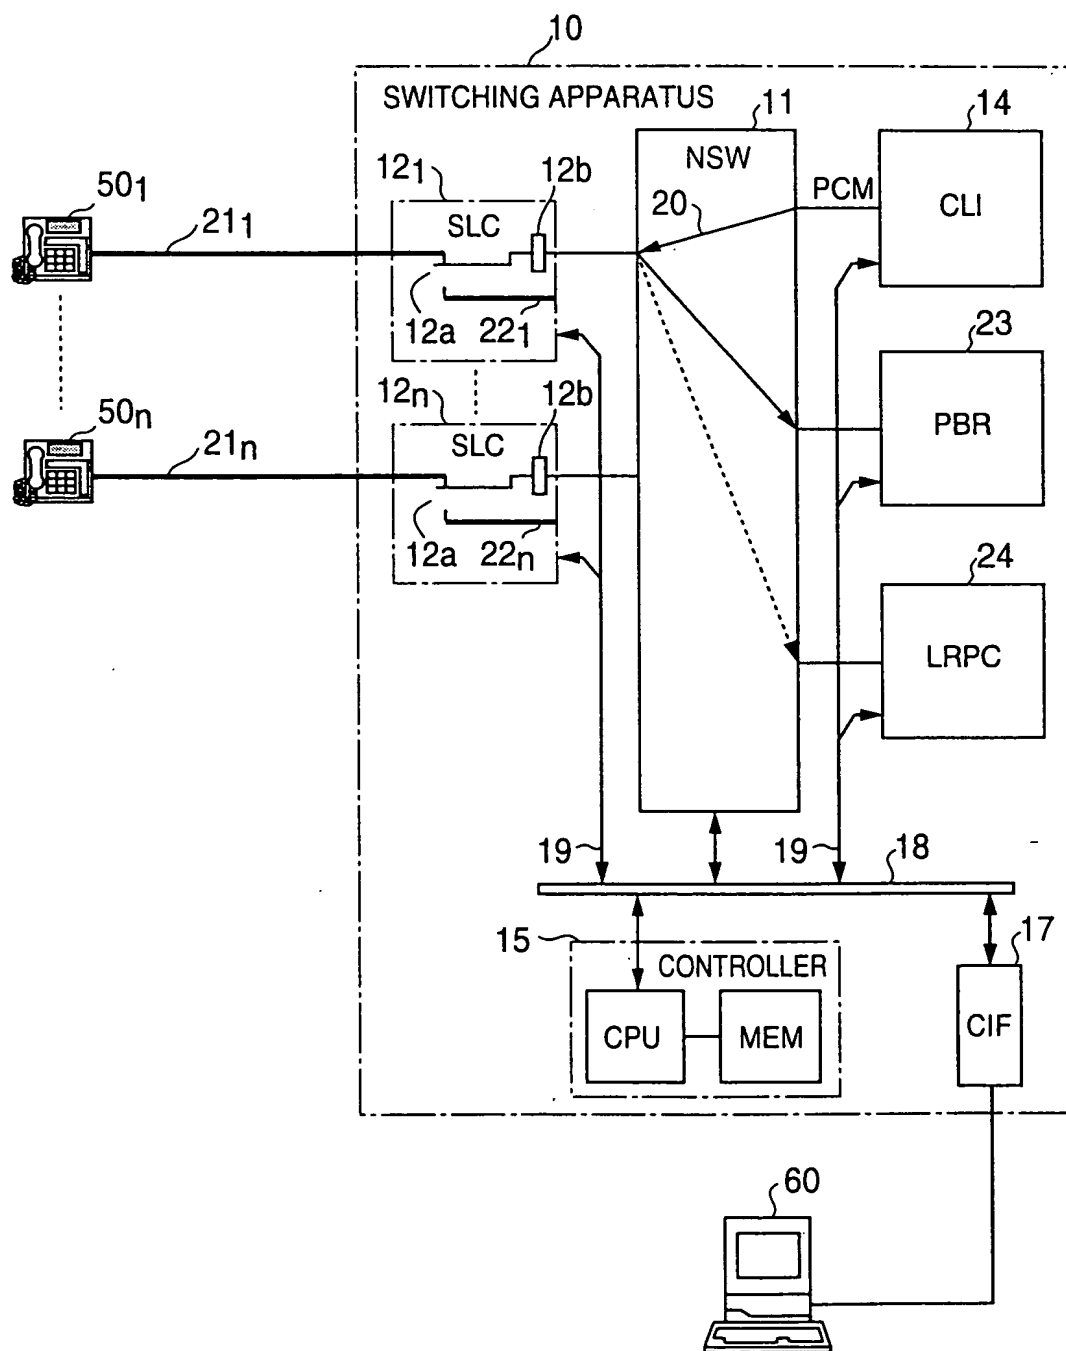

009001" 82662960


FIG. 16

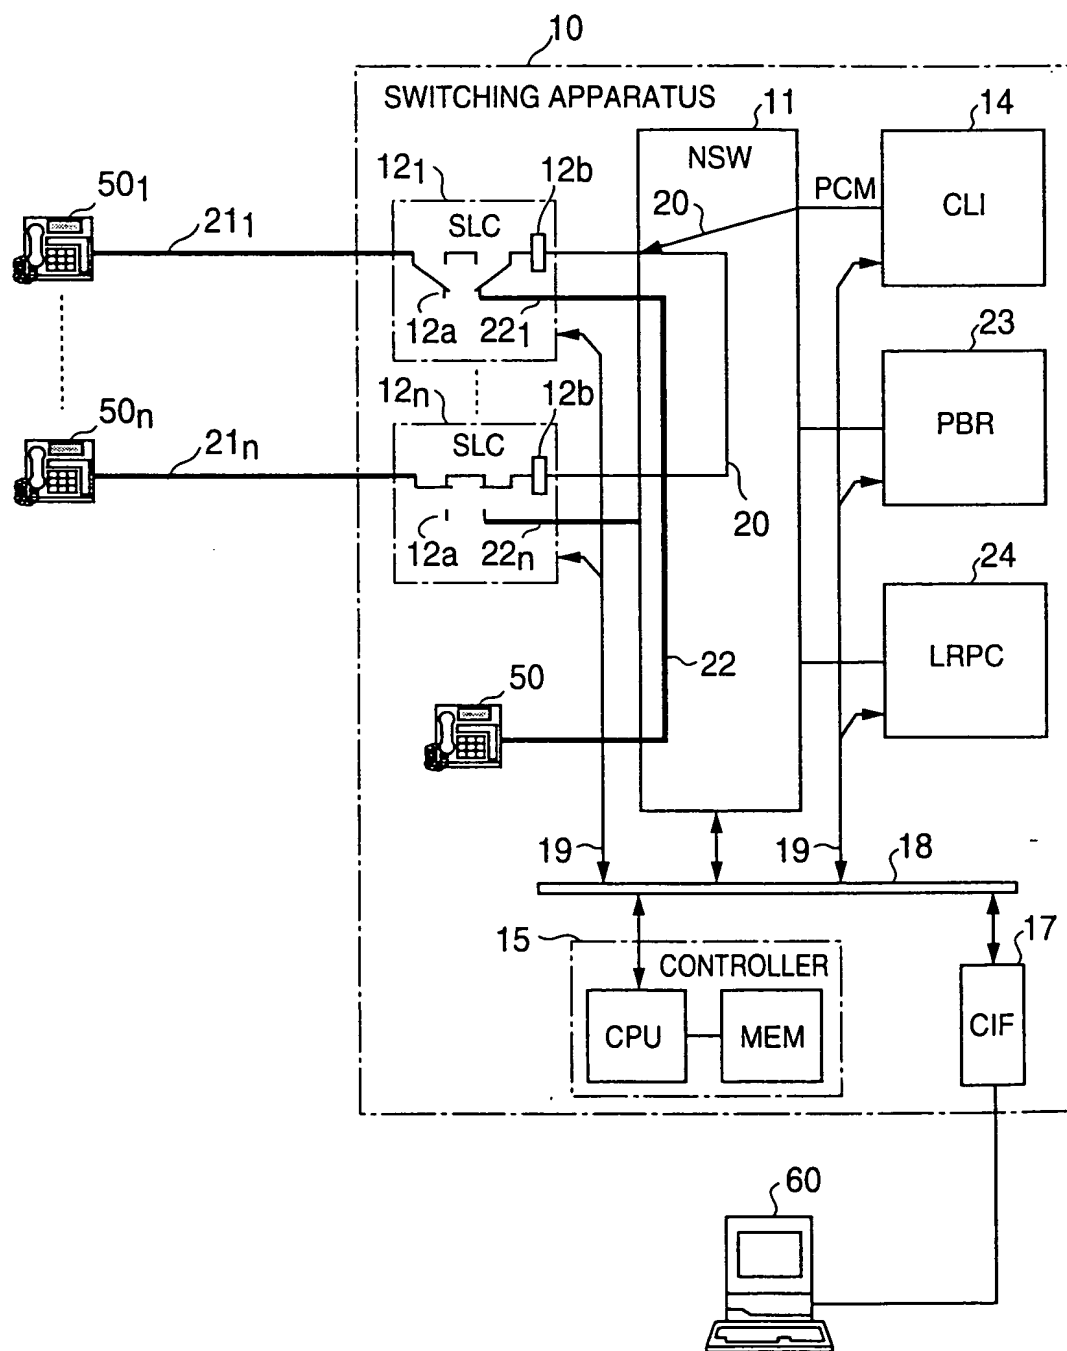


009007-82662960

005001-62662960


FIG. 17

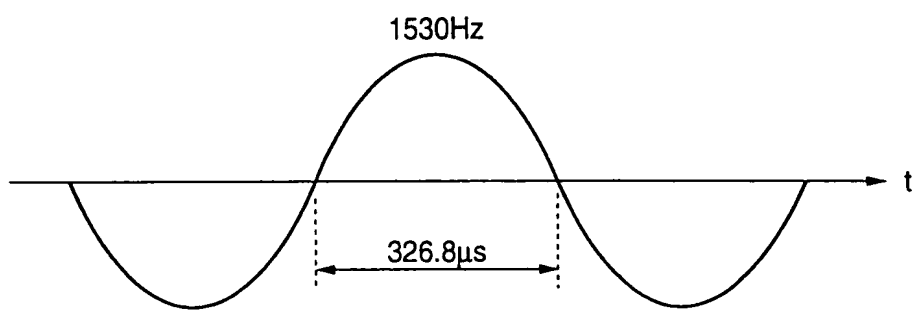

(A) MARK

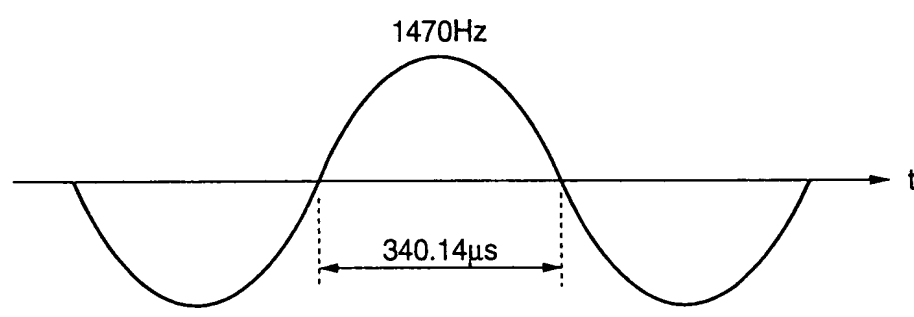

(B) SPACE

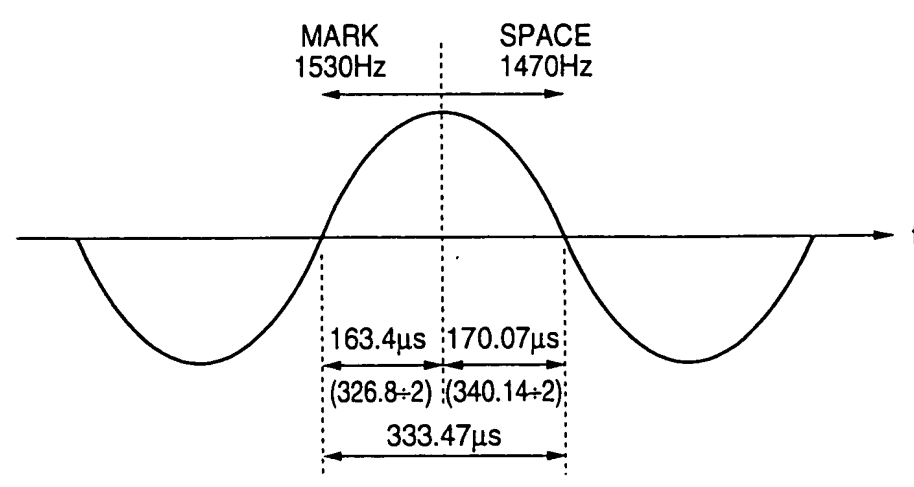

(C) MARK / SPACE

FIG. 18

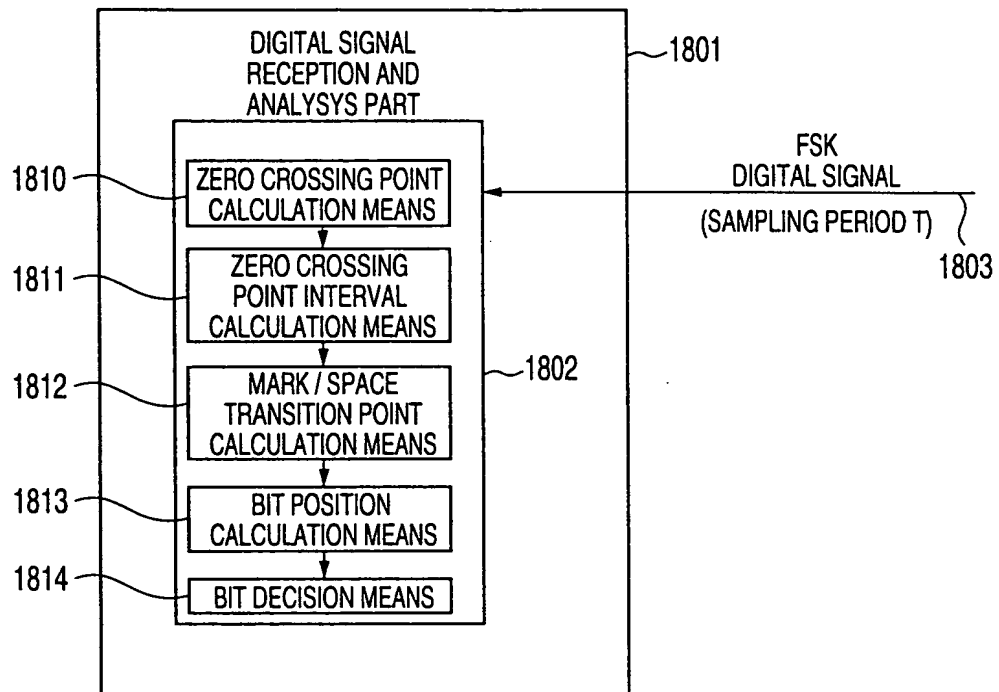


FIG. 19

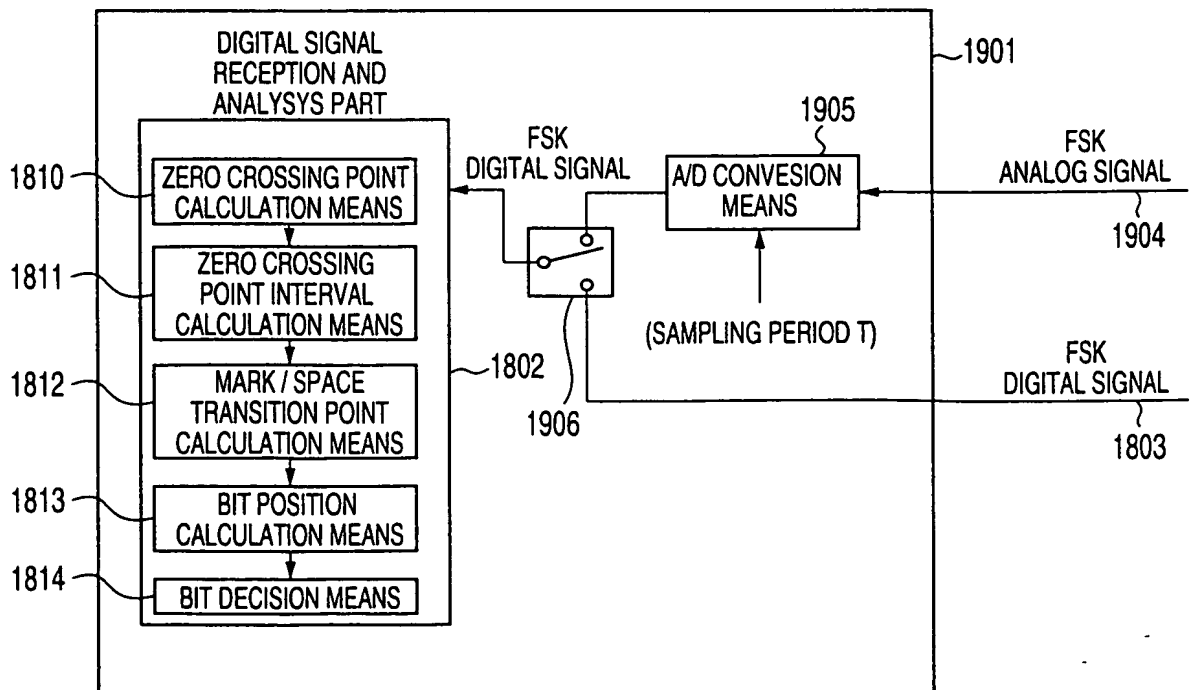


FIG. 20

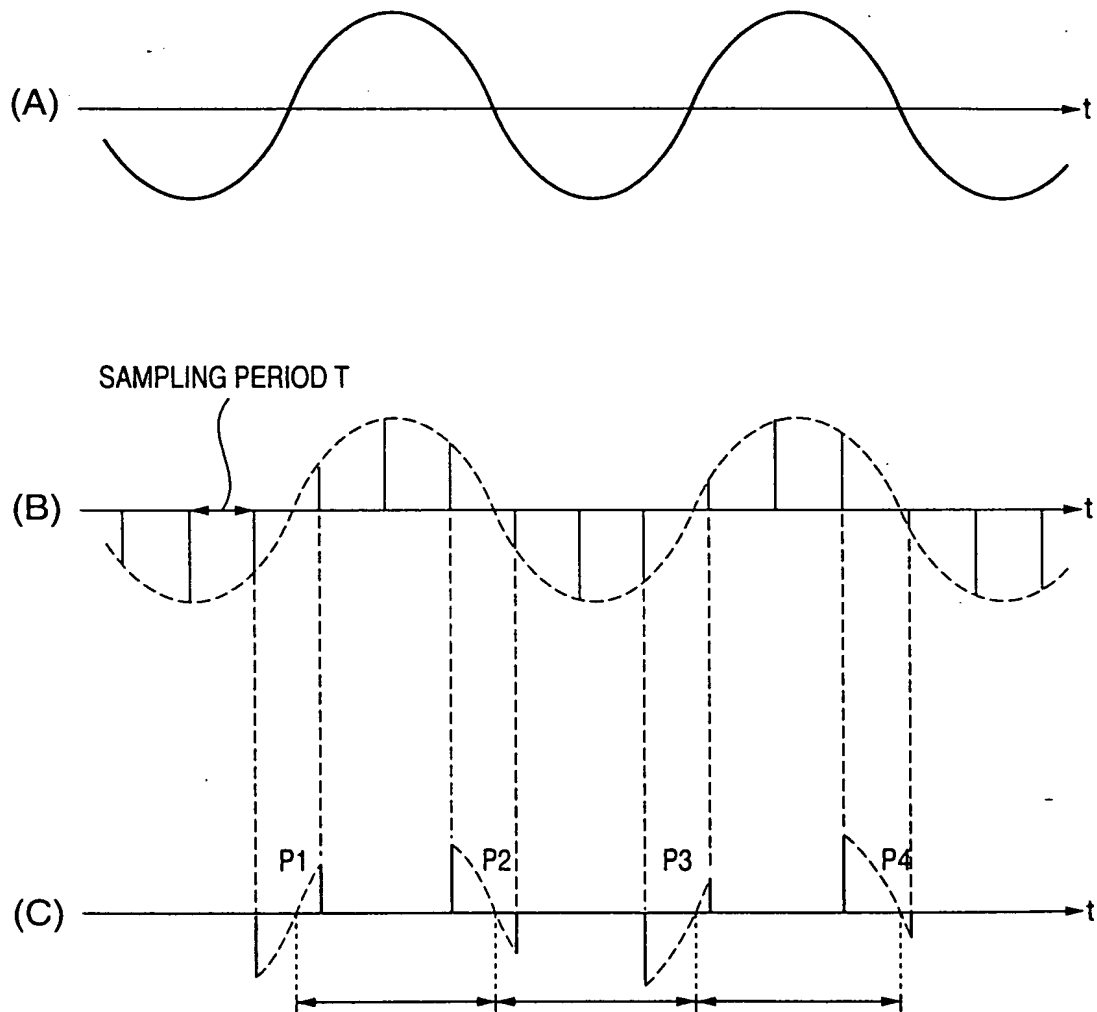


FIG. 21


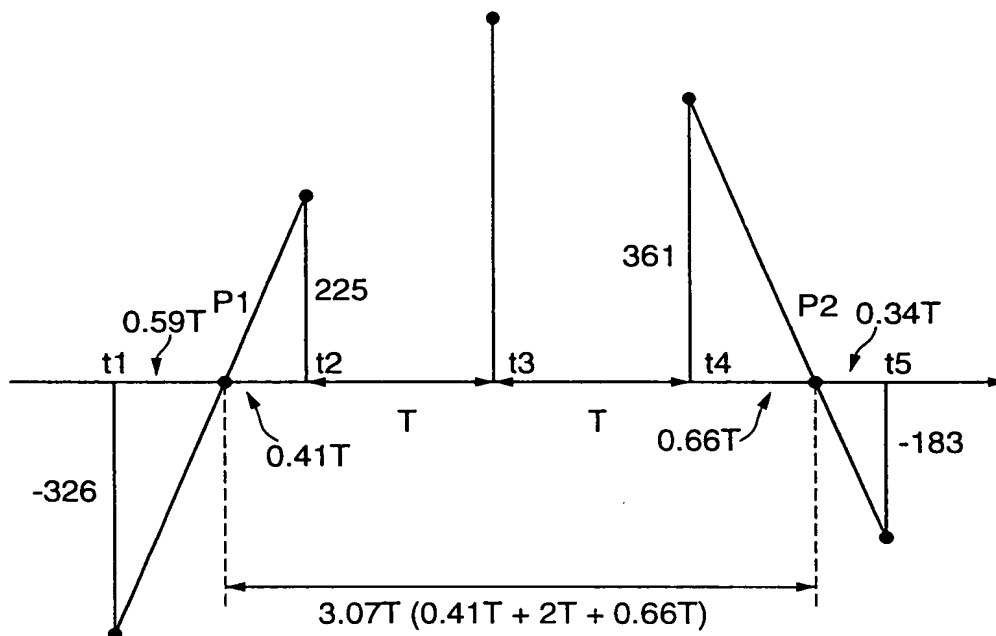


FIG. 22

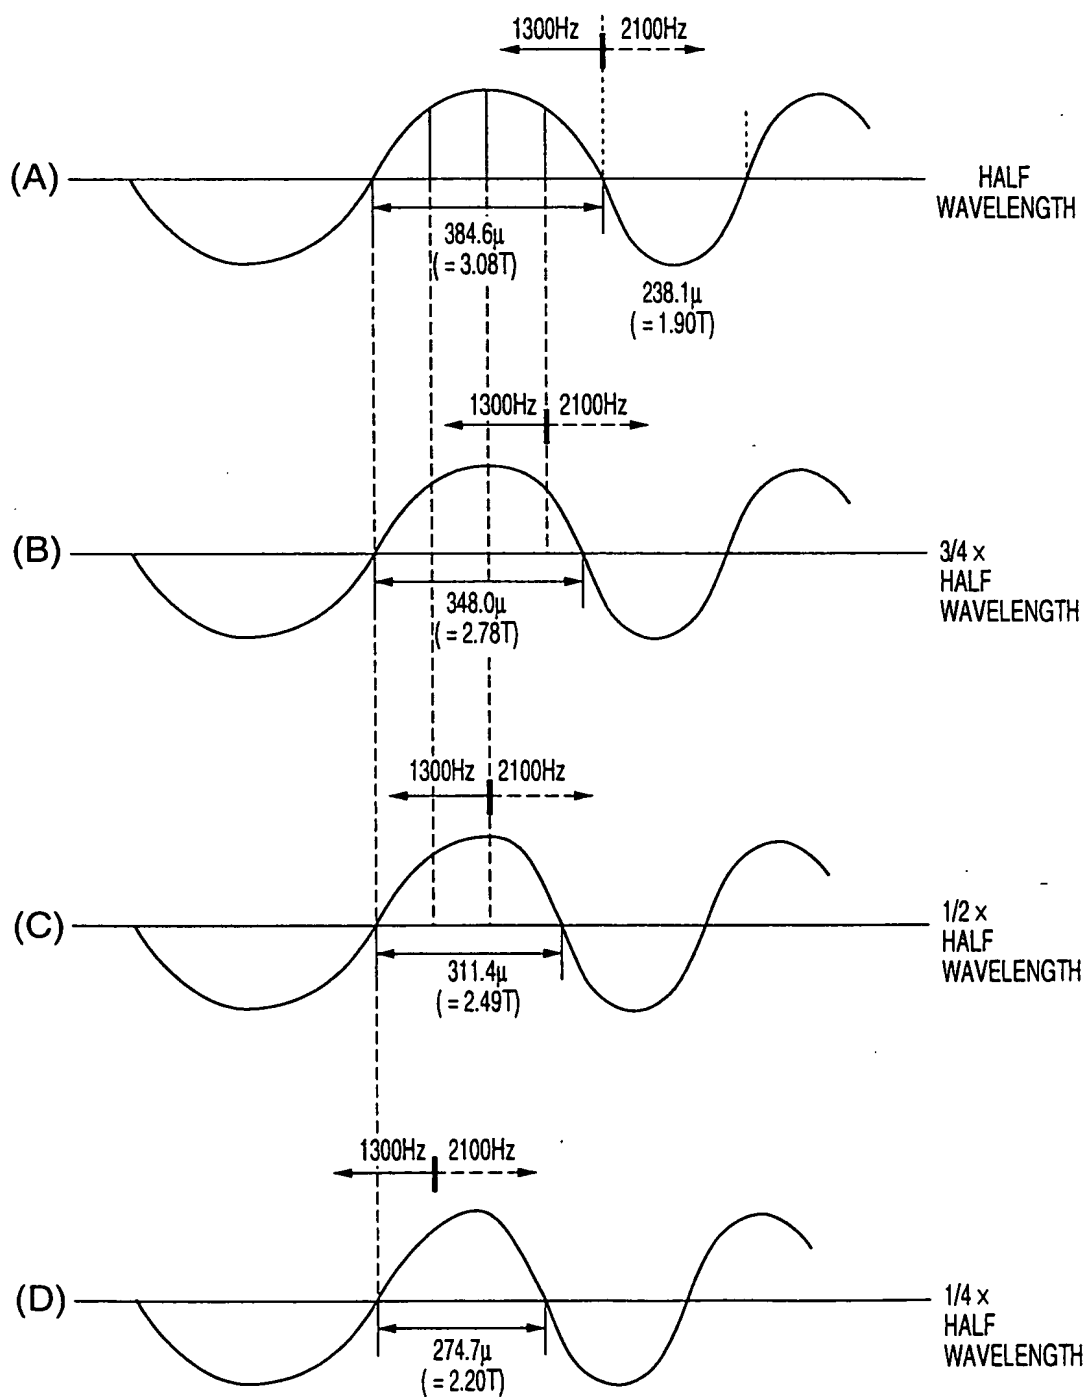

005001-32662960

FIG. 23

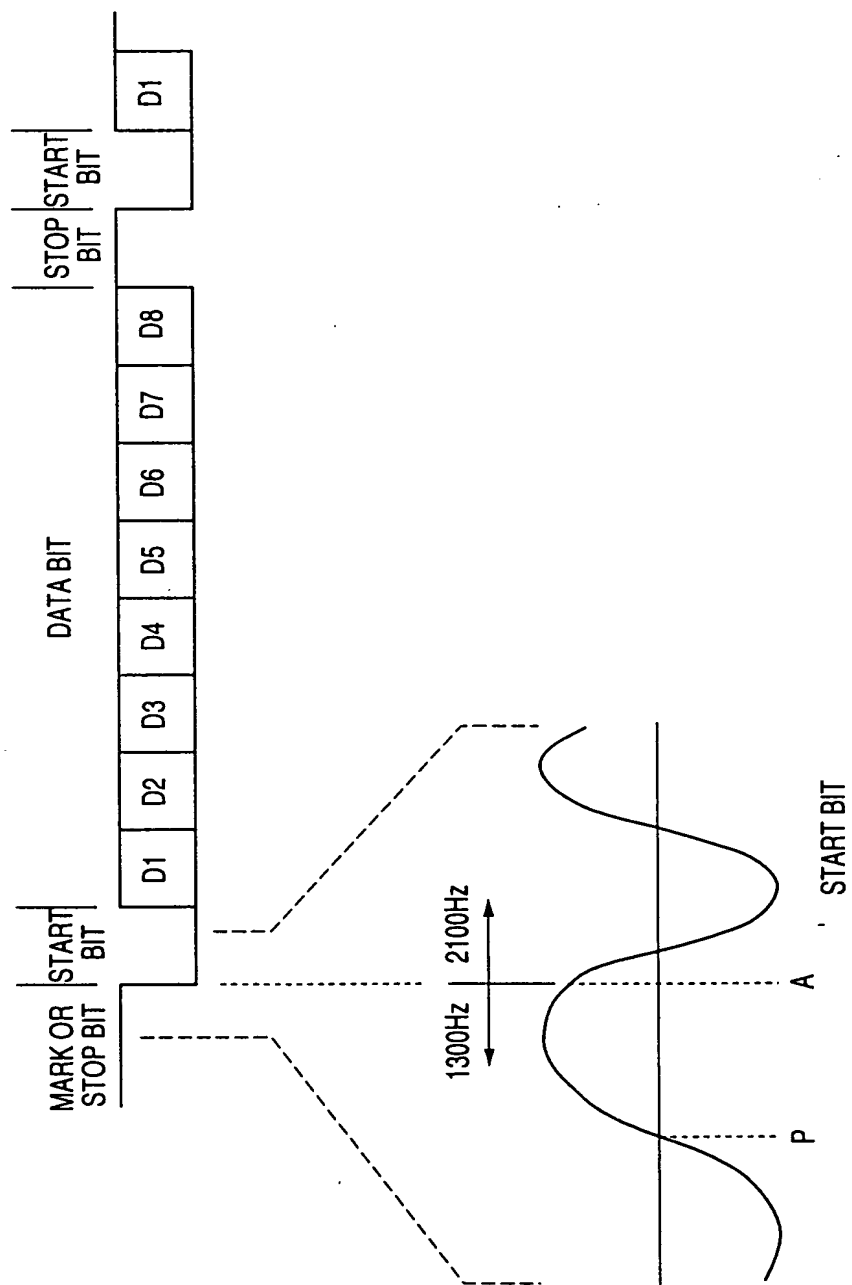


FIG. 24

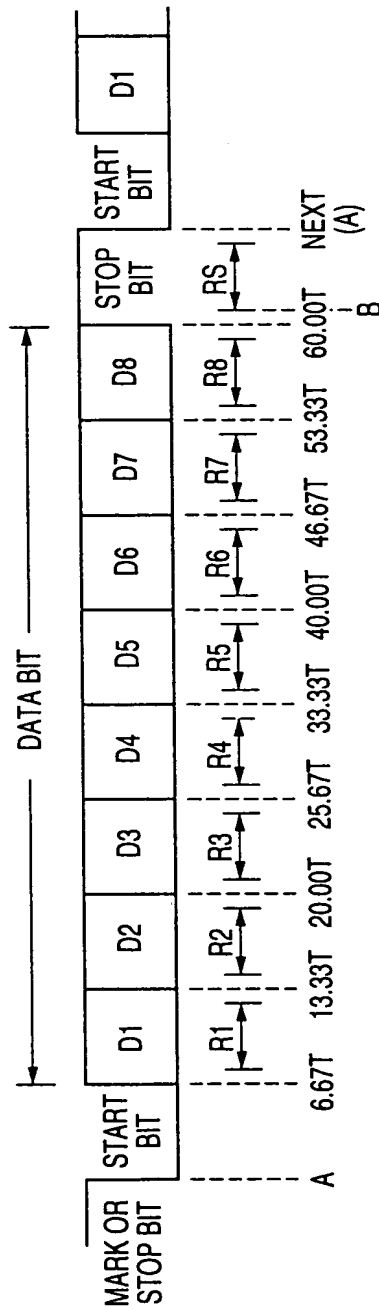


FIG. 25

